



# SK22 THRU SK210

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER


Reverse Voltage - 20 to 100 Volts      Forward Current - 2.0 Ampere

### FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Metal silicon junction, majority carrier conduction
- Low reverse leakage
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds at terminals

### MECHANICAL DATA

**Case:** JEDEC SMB(DO-214AA) molded plastic body  
**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.005 ounce, 0.138 grams

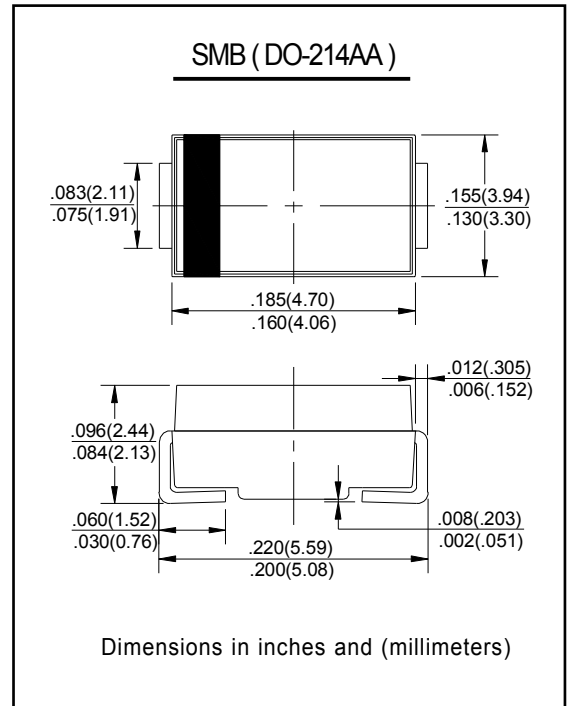

### Maximum Ratings and Electrical Characteristics @<sub>T<sub>A</sub></sub>=25°C unless otherwise specified

Characteristic	Symbol	SK22	SK23	SK24	SK25	SK26	SK28	SK29	SK210	Unit	
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	20	30	40	50	60	80	90	100	V	
Working Peak Reverse Voltage	V <sub>RWM</sub>									V	
DC Blocking Voltage	V <sub>R</sub>									V	
RMS Reverse Voltage	V <sub>R(RMS)</sub>	14	21	28	35	42	56	64	71	V	
Average Rectified Output Current @ <sub>T<sub>L</sub></sub> = 75°C	I <sub>O</sub>	2.0								A	
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	50								A	
Forward Voltage @ <sub>I<sub>F</sub></sub> = 2.0A	V <sub>FM</sub>	0.50			0.70		0.85			V	
Peak Reverse Current @ <sub>T<sub>A</sub></sub> = 25°C At Rated DC Blocking Voltage @ <sub>T<sub>A</sub></sub> = 100°C	I <sub>RM</sub>	0.5								20	mA
Typical Thermal Resistance (Note 1)	R <sub>θJL</sub> R <sub>θJA</sub>	17 75								°C/W	
Operating Temperature Range	T <sub>j</sub>	-65 to +125								°C	
Storage Temperature Range	T <sub>STG</sub>	-65 to +150								°C	

Note: 1. Mounted on P.C. Board with 5.0mm<sup>2</sup> copper pad area.



# SK22 THRU SK210

## RATINGS AND CHARACTERISTIC CURVES

FIG. 1- FORWARD CURRENT DERATING CURVE

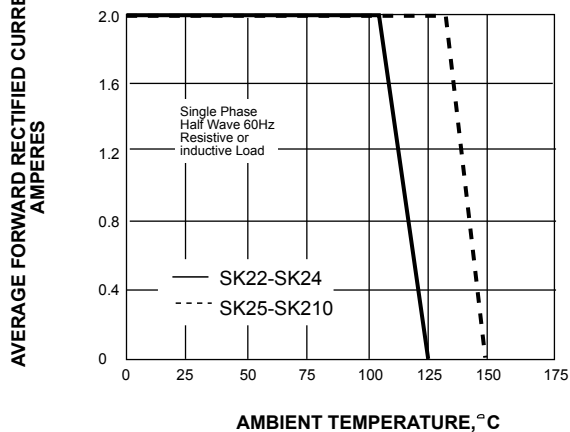


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

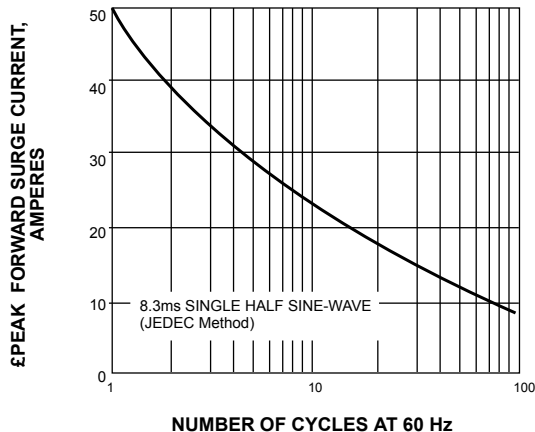


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

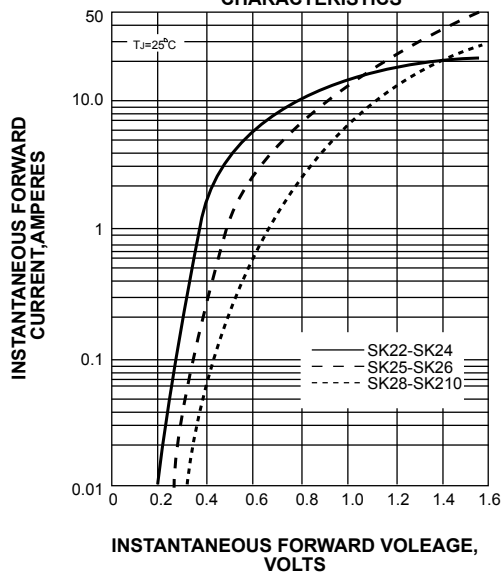


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

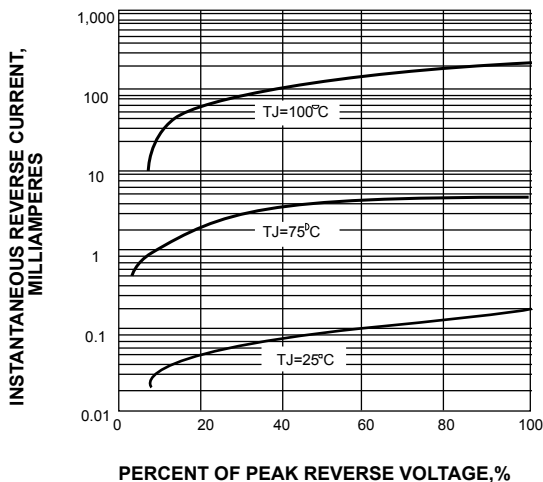


FIG. 5-TYPICAL JUNCTION CAPACITANCE

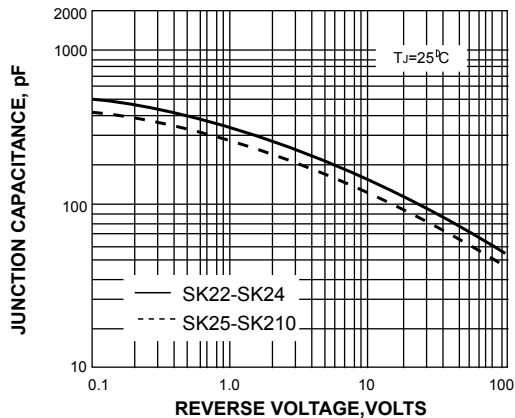


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

